

RR608 Trailer Assembly Manual


- 1.) Unpack all pieces from the tub & crate, empty bag with nuts, bolts and pins onto a flat surface.



- 2.) Find the main frame, lay on the floor with axle tabs facing up.



- 3.) Place the walking beams between the tabs on either side, there is not a right or left, either walking beam can be used for both sides, however, one leg of the walking beam is longer than the other, the 39cm leg of the axle should be towards the front of the trailer on both sides. Line up the hole in the walking beam with the tabs on the frame, push the pin in to hold axles in place.

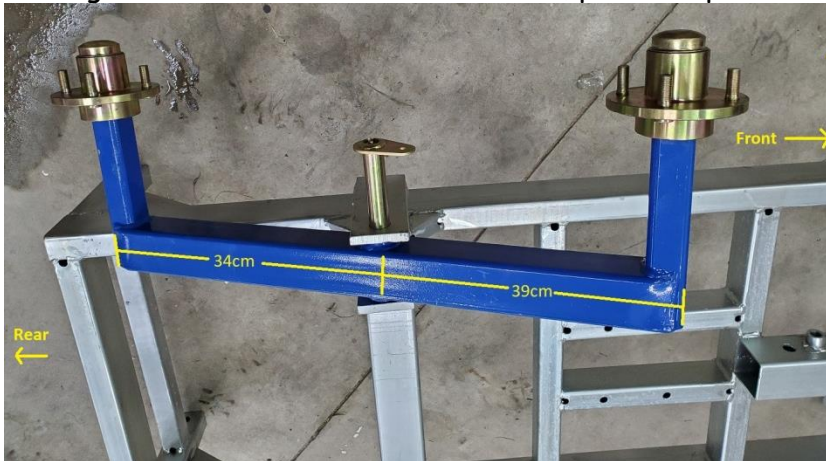

- 4.) Install 13mm bolt & nut washer through the plate on the pin and the frame tab, tighten nut & bolt. Install cotter pin, repeat for the opposite side.



- 5.) Grease both swivel pins.



- 6.) Install all 4 tires and tighten wheel nuts to 40ft/lbs.



- 7.) Flip frame section over so that the frame is higher than the walking beams.



- 8.) Install frame tube into main frame, holes at coupler end face up & down, larger diameter bolt holes face up for the coupler.



- 9.) Large bolt goes through frame tube and main frame, tighten nut. Tighten 2 bolts on the side of the frame rail, then tighten retaining nuts.



- 10.) Slide battery box onto frame tube and then slide the tongue jack on, install the 2 retainer bolts for the battery box but do not tighten, Move the tongue jack approximately 12cm back from coupler bolt hole and tighten the retainer bolt. (note battery box may be blue or black)



- 11.) Slide the swivel coupler mount in, position the swivel up or down depending on your ATV hitch height, tighten both bolts.



- 12.) Grease coupler swivel.



- 13.) Install hydraulic fitting into cylinder (if not pre-Installed), install brackets and cylinder on frame, hydraulic fitting should be facing the side with the hose retainer straps, tighten all 4 bolts.




- 14.) Install the hydraulic hose onto the cylinder and tighten.




- 15.) Run the hydraulic hose through the clips and bend the clips to hold the hose in place.



- 16.) Install the hydraulic pump into the battery box, check all nuts holding wires, overtightening can break the housing. 2 Bolts secure the pump through the bottom of the battery box.

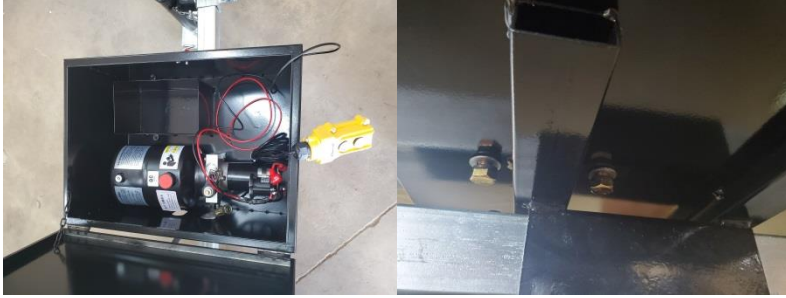

- 17.) Attach the hose to the hydraulic pump.

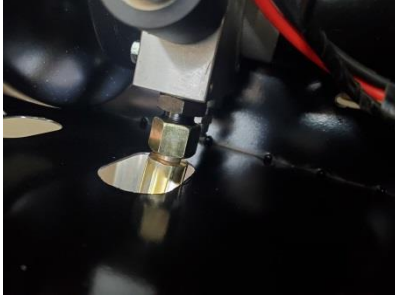

- 18.) Set the trailer deck on top of the frame.



- 19.) Line up the tabs at the rear of the deck and insert the pivot bolts, tighten the bolts but leave space between the tabs and frame so the deck can swivel up and down freely.



- 20.) Slide the battery box to approximately 15-20cm away from the deck and tighten the 2 retaining bolts.



- 21.) Line up holes to mount the cylinder to the deck taba and insert pin, lock pins in place with circlip.



- 22.) Install battery, tighten hold down bar, mount battery posts and attach the wires from the hydraulic pump, red is positive or +.



- 23.) Mount front deck panel, snug 3 bolts up, do not tighten yet.



- 24.) Install rear corner posts into deck and put retainer bolts in, do not tighten yet..



25.) Hold the deck side panel at a lowered position and slide the pins into the deck sockets, then raise the side and fasten the front and rear lock clips, repeat for the other side.



26.) Mount tailgate, put in 2 bolts and tighten until locknut plastic is engaged in the threads and go 2 more turns. Fasten lower clips.



27.) Tighten the 3 bolts on front deck plate and the 2 bolts at the bottom of the rear corner posts.



28.) Fill hydraulic tank with 5L of AW32 Hydraulic Oil and test.



29.) After raising and lowering 3 -4 times, recheck oil level